


The movable drying installation is for drying pressure-tested hoses of different diameters and lengths. Adaptation has to be made to the STORZ solid fire hose coupling C.

Furtheron, internal drying of steel cylinders and extinguishers of different sizes can be made by using optional accessory M3.

**The unit consists of:**

- » Compact construction made of square metal pipe 25 x 25 mm with height adjustable handle
  - » Fan and heater are placed behind a sheet covering in a space saving and protected way
  - » Fan and blower are switched separately by two-stage switch. Therefore, the fan is always disconnected after the heater
- TR-F-1 Modul M3 (No. 501 100)
- » Heating up to max. 100°C, adjustable by potentiometer
  - » Electric connection by CEE reversing plug with 3 m cable

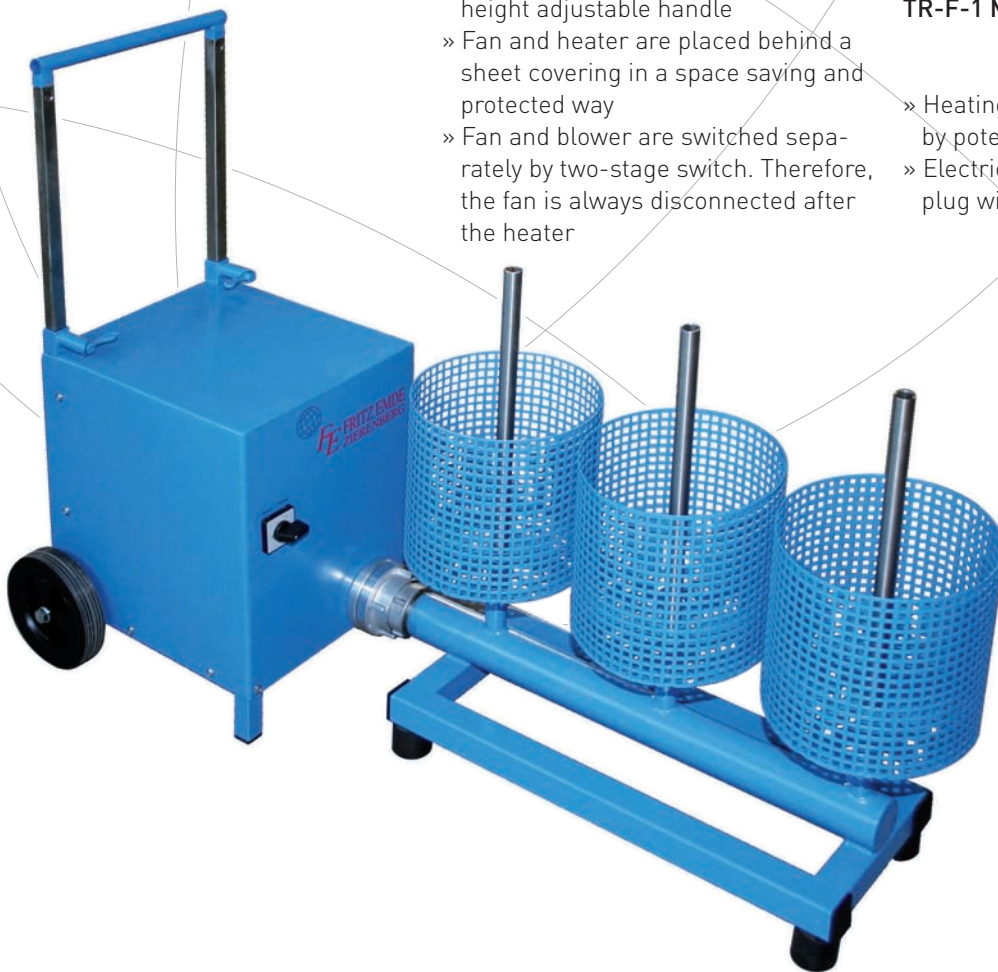

### TECHNICAL DATA

Fan motor:	230 V AC, 1.1 kW
Heater:	230 V, max. 2200 W, 0°C – 100°C, continuously adjustable
Colour:	hammer finish painted blue or silvergrey
Dimensions (l x w x h):	approx. 420 x 380 x 500 mm
Transportation height:	approx. 865 mm
Weight:	approx. 34 kg

### TECHNICAL DATA

**The module M3 can be extended according to customer need by additional drying spikes (available at extra charge):**

Dimensions (l x w x h):	approx. 700 x 400 x 650 mm
Weight:	approx. 10 kg
Colour:	hammer finish painted blue or silvergrey