

## Mobile Drying Units

### No. 501 000 · TR-F-1 / M3

**The movable drying installation is for drying pressure-tested hoses of different diameters and lengths. Adaptation has to be made to the STORZ solid fire hose coupling C.**


Furtheron, internal drying of steel cylinders and extinguishers of different sizes can be made by using optional accessory M3.

#### The unit consists of:

- » Compact construction made of square metal pipe 25 x 25 mm with height adjustable handle
- » Fan and heater are placed behind a sheet covering in a space saving and protected way
- » Fan and blower are switched separately by two-stage switch. Therefore, the fan is always disconnected after the heater
- » Heating up to max. 100°C, adjustable by potentiometer
- » Electric connection by CEE reversing plug with 3 m cable

#### TR-F-1 Modul M3

(No. 501 100)

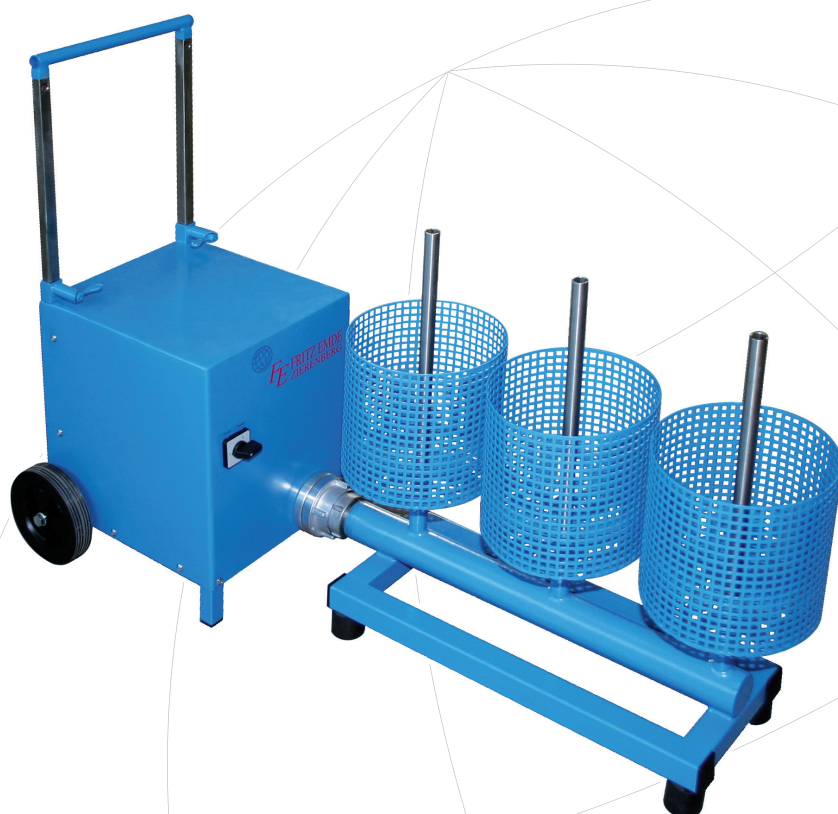

#### TECHNICAL DATA

Fan motor:	230 V AC, 1.1 kW
Heater:	230 V, max. 2200 W, 0°C – 100°C, continuously adjustable
Colour:	hammer finish painted blue
Dimensions (l x w x h):	approx. 420 x 380 x 500 mm
Transportation height:	approx. 865 mm
Weight:	approx. 34 kg

#### TECHNICAL DATA

**The module M3 can be extended according to customer need by additional drying spikes (available at extra charge):**

Dimensions (l x w x h):	approx. 700 x 400 x 650 mm
Weight:	approx. 10 kg
Colour:	hammer finish painted blue