

Trolleys

No. 906 500 · WATER DAMAGE TROLLEY

The EMDE WATER DAMAGE TROLLEY is used for the safe transportation of water suction equipment, sewage pumps, immersion pumps, cable drums, hoses and accessories.


The trolley is fitted with 2 steering/braking wheels and two fixed wheels. The wheels have Aluminium rims and solid rubber tyres to ensure the trolley has minimal rolling resistance and is easy to manoeuvre despite its weight even on rough ground. The single wheel load is 400 kg.

The trolley is fitted with:

- » 1 intermediate shelf
- » 1 completely removable long side element

Options available at extra charge:

- » Kill switch (pull) (No. 950 999)
- » Kill switch (push) (No. 950 998)
- » Brackets for storing additional equipment

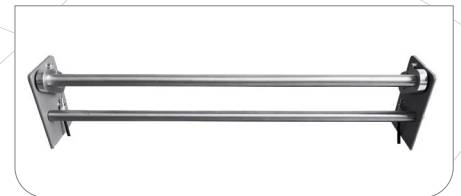

TECHNICAL DATA

Dimensions (l x w x h)	approx. 1200 x 800 x 1850 mm
Construction	zinc plated wire grating steel construction
Weight (empty)	approx. 85 kg
Load	max. 500 kg

Licences and guidelines:

- » Complies with GGVSE (German regulations for the transportation of dangerous goods by road and rail)
- » Complies with "Guidelines for the design and use of non-powered trolleys by fire services" (Expert recommendation No. 2/2014 from the DFV (German Fire Service Association))