

Accessories

No. 200 100 · CO₂-QUICK

The CO₂-filling connection with isolating and relief valve is for the filling of CO₂-fire extinguishers and CO₂-cylinders with a male thread (W 21,8 x 1/14")


The EMDE CO₂-filling connection guarantees a fast and economic CO₂-filling procedure. Less than 10 g CO₂ must be discharged, to depressurize the adaptor.

The unit is equipped with:

- » Isolating ball valve
- » CO₂-threaded connection with handwheel

TECHNICAL DATA

Operating pressure:	max. 130 bar
Version:	<ul style="list-style-type: none"> » corrosion-resistant » sealings are CO₂-resistant » protection shell and relief outlet
Dimensions (lxw):	approx. 180 x 180 mm

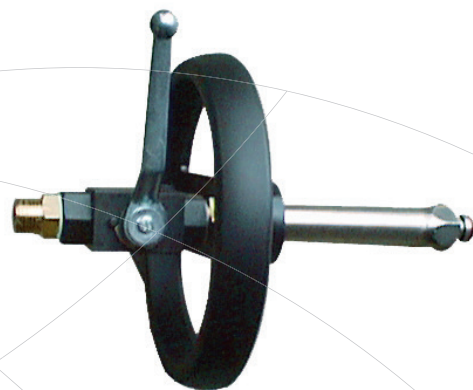

ADAPTOR · SPECIAL TOOL BOX

ANSUL Adaptor (No. 200 201)



FAC Adaptor (No. 200 205)
Wrench size 5 or 6 mm



GLORIA Adaptor (No. 200 209)



Special tool box (No. 200 200)
for closing of CO₂-cartridges

