






CO₂-Filling Units

No. 255 000 · KU5-DI

CO₂-filling unit KUD5Di suitable to fill any size, shape or make of CO₂-cartridges (from 20 g) and CO₂-bottles (up to 6 kg) with the universal filling head.

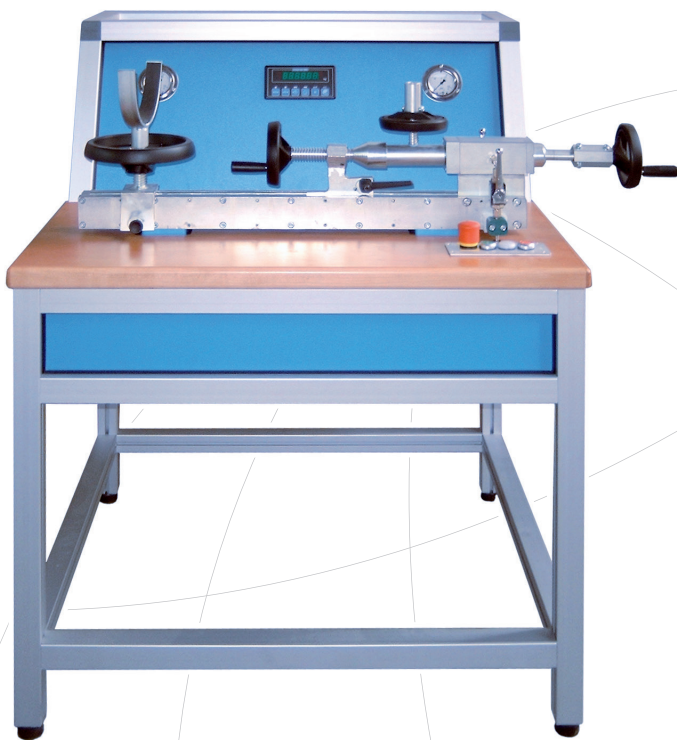

KUS5-LW (No. 235 100)

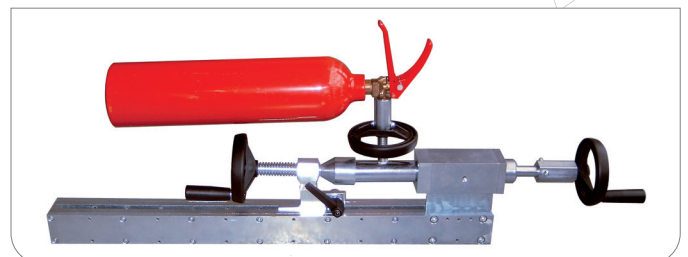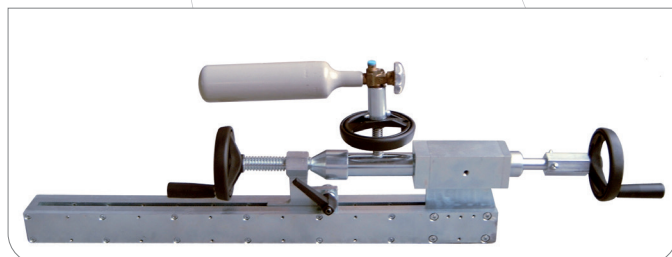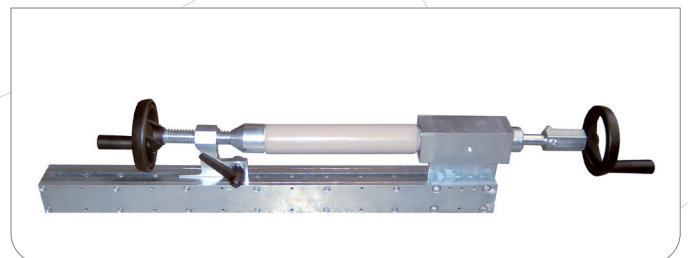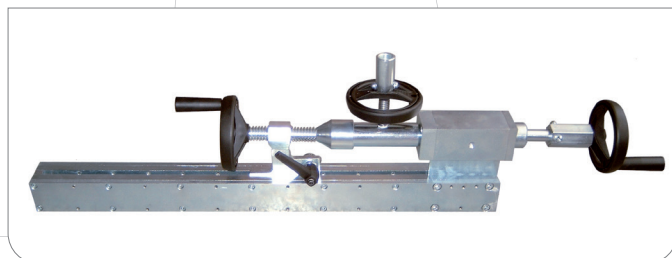



CO₂-Filling Units

No. 255 000 · KU5-DI · KUD5-DI · KUS5-DI

The unit is equipped with:

- » Compressed-air driven CO₂-pump
- » Integrated digital scale up to 30 kg weighing range with automatic cut-off feature. Resolution 10 g or optional
- » Filling of large bottles more than 6 kg has to be carried out on a separate floor scale with automatic cut-off feature (optional accessory)
- » Safety valve (130 bar)

Optional available at extra charge:

- » Mechanical sliding weight scale
- » Electric supply with three-phase current 230/400 V, 60 Hz
- » Equipped with label printer
- » CO₂-steel filter

TECHNICAL DATA

KU5-DI (No. 255 000)

Motor:	AC 230 V, 50 Hz
Dimensions (l x w x h):	approx. 1000 x 900 x 600 mm
Colour:	hammer finish painted blue
Standard accessories:	<ul style="list-style-type: none"> » 3 adaptors for filling of CO₂-cartridges: 18, 25 and 32 mm diameter » 1 CO₂ high-pressure hose, 2 m » 1 rotary filling valve „DF 1“ to fill CO₂-bottles » Support KS-5 » Set of sealings for filling adaptors

TECHNICAL DATA

KUD5-DI (No. 207 000)

Drive:	compressed-air from 8 bar 800 ltr. air/min
Motor:	AC 230 V, 50 Hz
Dimensions (l x w x h):	approx. 1000 x 900 x 600 mm
Colour:	hammer finish painted blue
Standard accessories:	<ul style="list-style-type: none"> » 3 adaptors for filling of CO₂-cartridges: 18, 25 and 32 mm diameter » 1 CO₂ high-pressure hose, 2 m » 1 rotary filling valve „DF 1“ to fill CO₂-bottles » Support, KS-5 » 1 set of sealings for filling adaptors

TECHNICAL DATA

KUS5-DI (No. 235 000)

Motor:	three-phase current 230/400 V, 50 Hz
Dimensions (l x h x w):	ca. 1000 x 900 x 600 mm
Colour:	hammer finish painted blue
Standard accessories:	<ul style="list-style-type: none"> » 3 adaptors for filling of CO₂-cartridges: 18, 25 and 32 mm diameter » 1 CO₂ high-pressure hose, 2 m » 1 rotary filling valve „DF 1“ to fill CO₂-bottles » Support KS-5 » 1 set of sealings for filling adaptors