

## CO<sub>2</sub>-Filling Units

### No. 265 000 · KU6/HF505RS

**Combined filling unit, model KU6/HF505RS to fill any size and type of CO<sub>2</sub>, Halon 1211 (BCF) and Halon 1301 (BTM)-cartridges, -extinguishers and big bottles with the universal filling rail).**


**The unit is equipped with:**

- » Silent 3-piston dosing pump for CO<sub>2</sub>
- » Self-sucking Halon 1301 (BTM) fluid pump with an emptying capacity up to 85%
- » Digital scale (30 kg with 10 g resolution) with automatic cut-off feature

- » Filling of large bottles more than 6 kg has to be carried out on a separate floor scale with automatic cut-off feature (scale not included)
- » No pre-cooling system for CO<sub>2</sub> source bottle required
- » Safety valve (130 bar)

**Accessories available at extra charge:**

- » Halon 1301 (BTM) gas pump for emptying capacity up to 98%
- » Pneumatic screwdriver
- » Digital scale with 5 g resolution
- » Digital floor scale, 150 kg, 50 g resolution

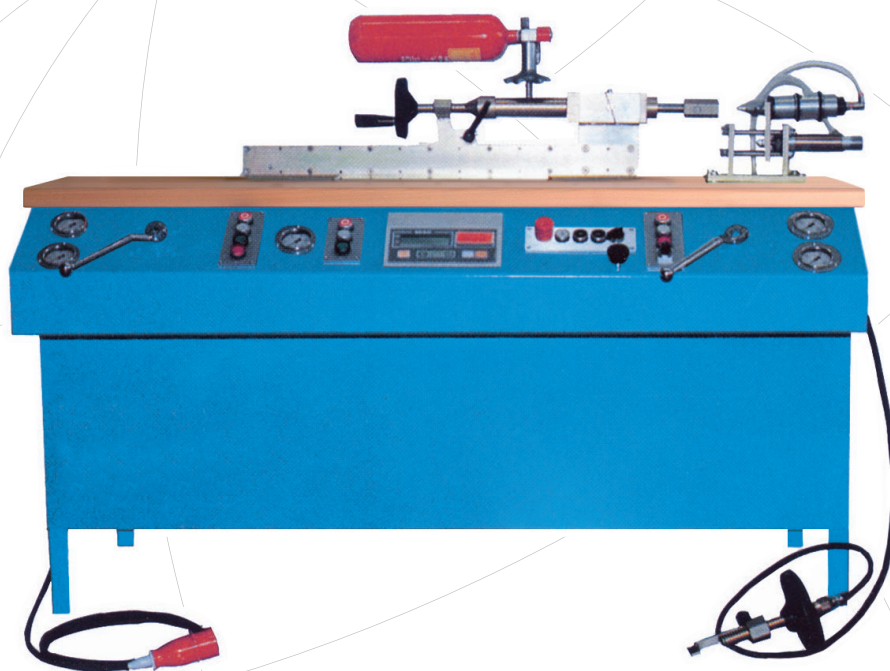

#### TECHNICAL DATA

Capacity CO <sub>2</sub> :	max. 4.2 kg/min
Operating pressure CO <sub>2</sub> :	130 bar
Capacity Halon:	max. 20 kg/min
Operating pressure Halon:	40 bar
Motor:	AC 230 V, 16 A, 50 Hz
Dimensions (l x w x h):	approx. 1600 x 750 x 850 mm
Colour:	hammer finish painted blue